

HITACHI


EX2500/EX2600

Lighting Design Simulation Report




EX2500 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-OVAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

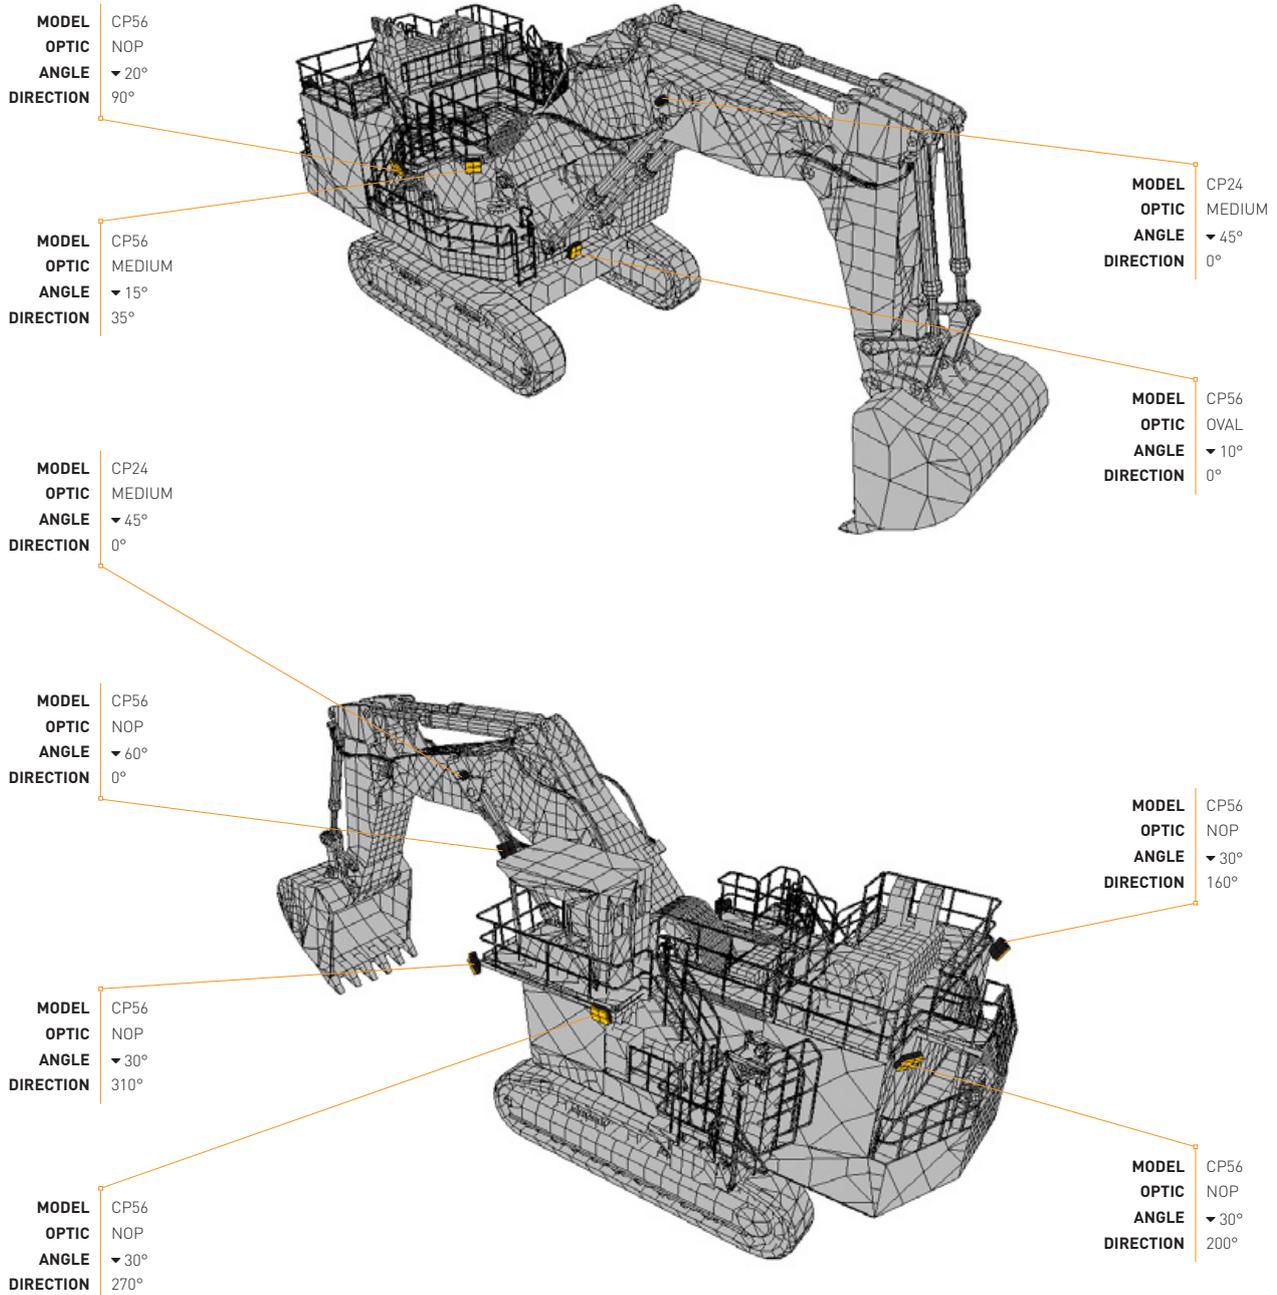


EX2500 ISOLINE VIEW

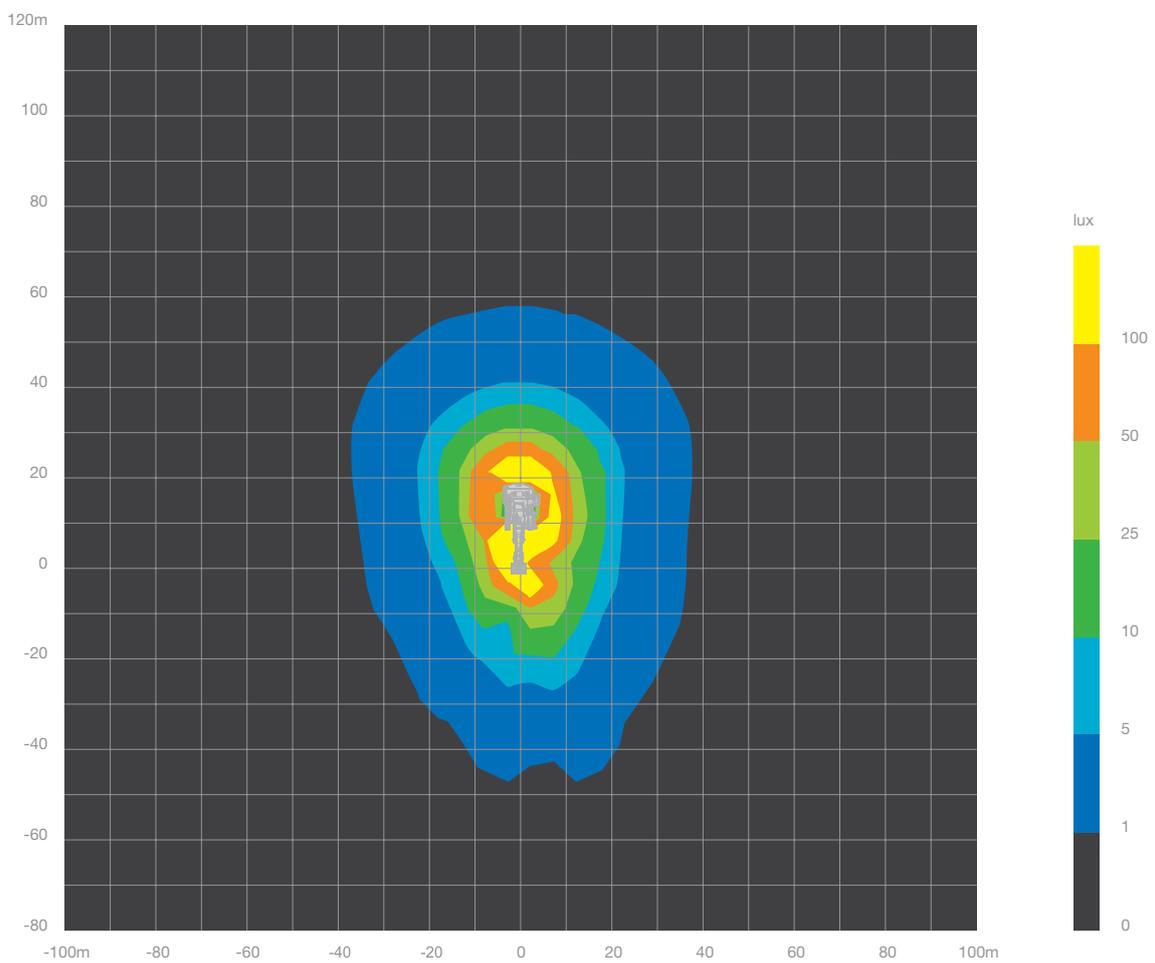


Light loss/maintenance factor: 0.85
Ambient temperature: 35°C

EX2500 Suggested Layout

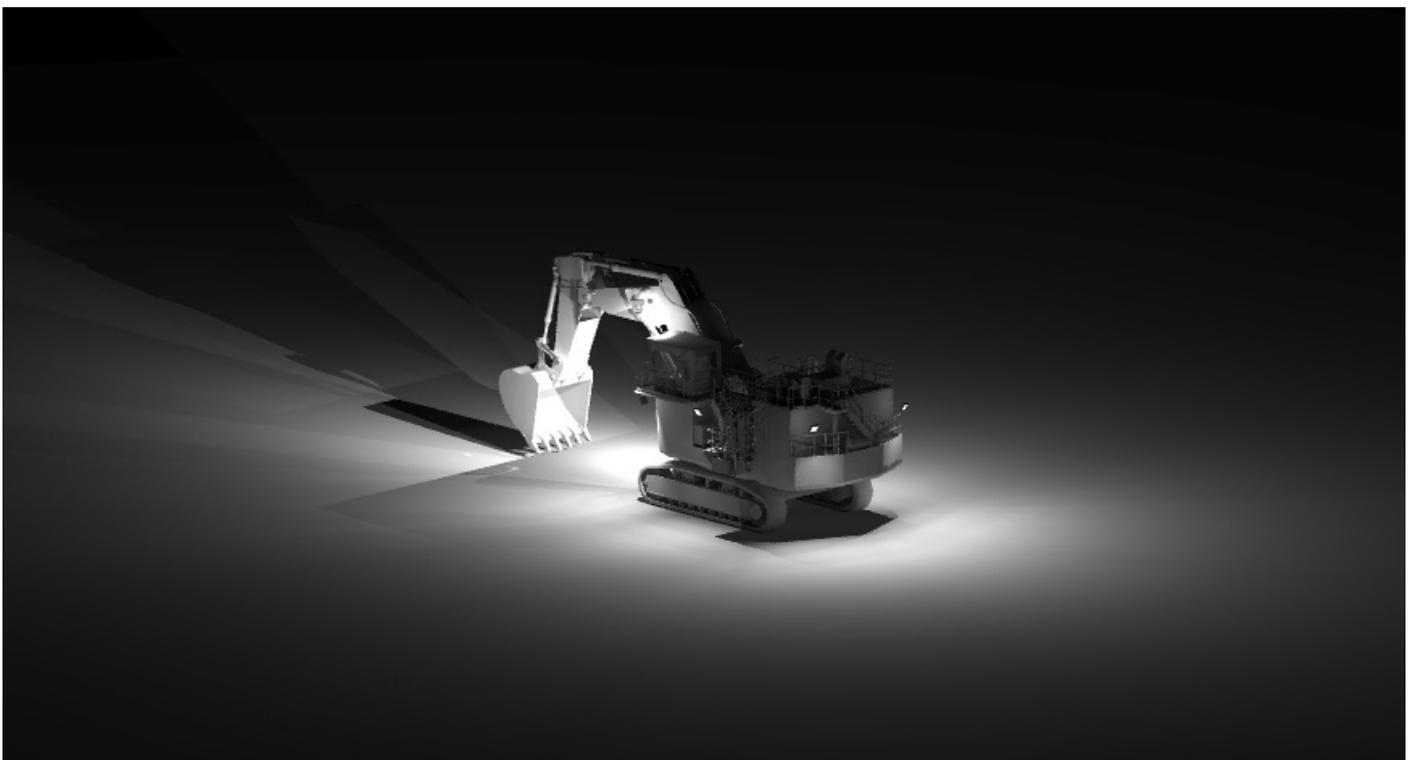


EX2600 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-OVAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	6
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	1
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

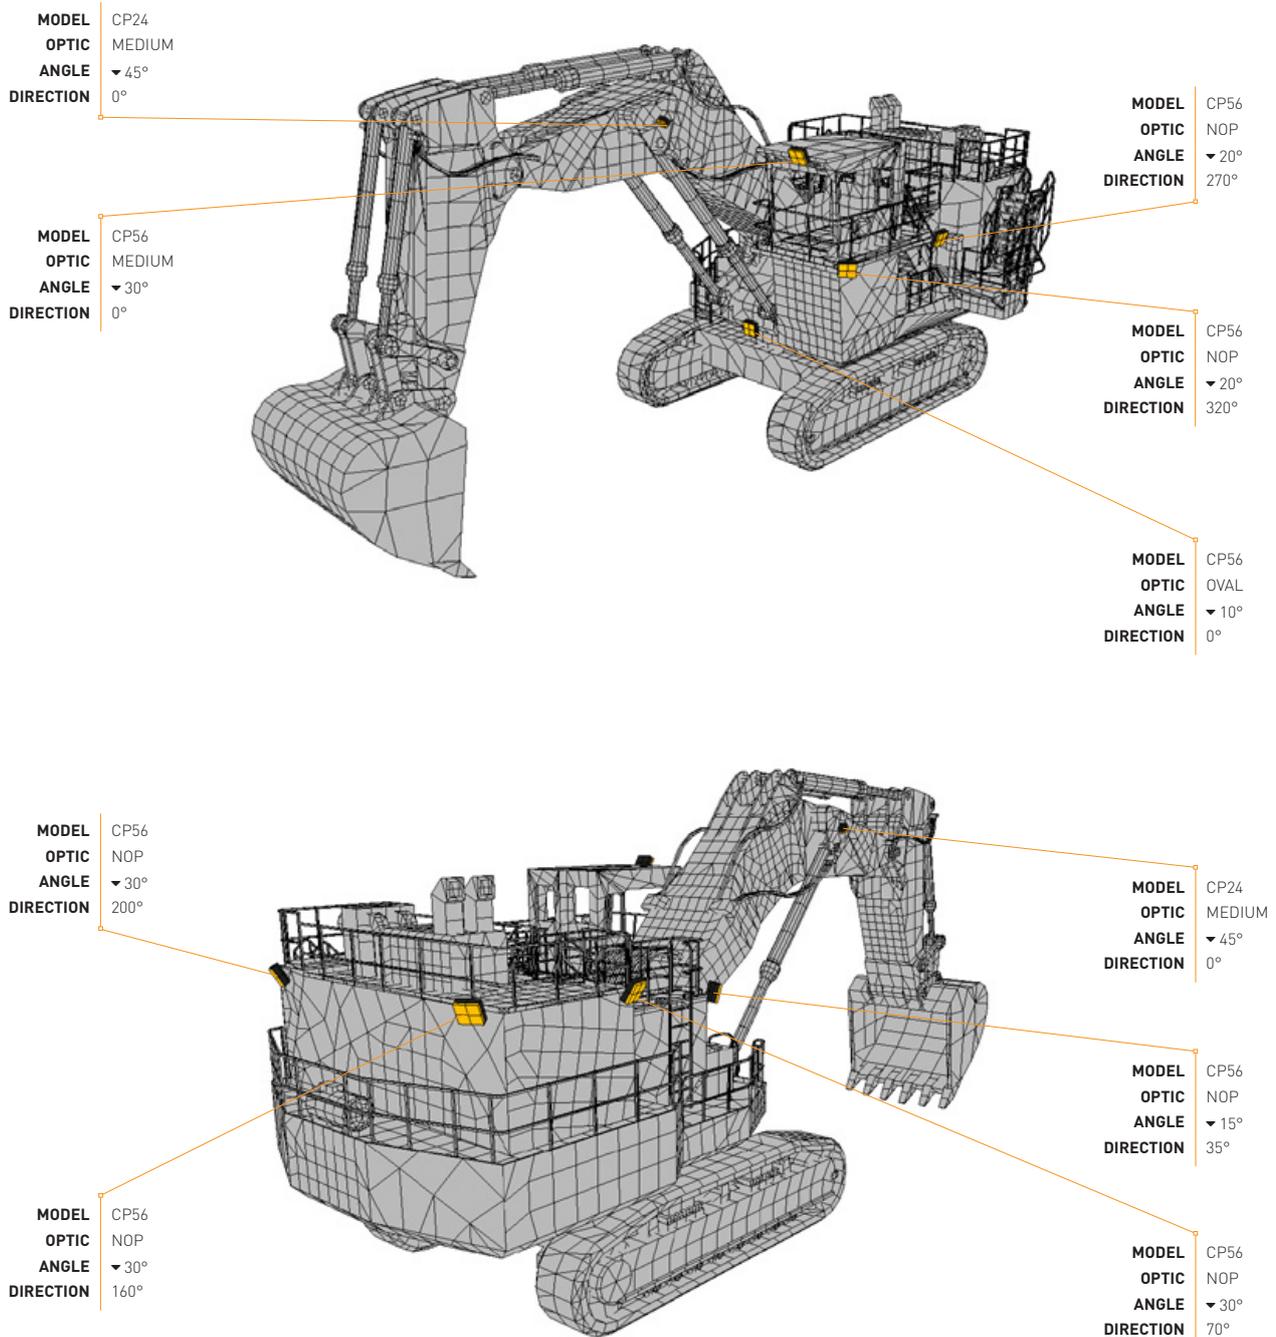

EX2600 ISOLINE VIEW

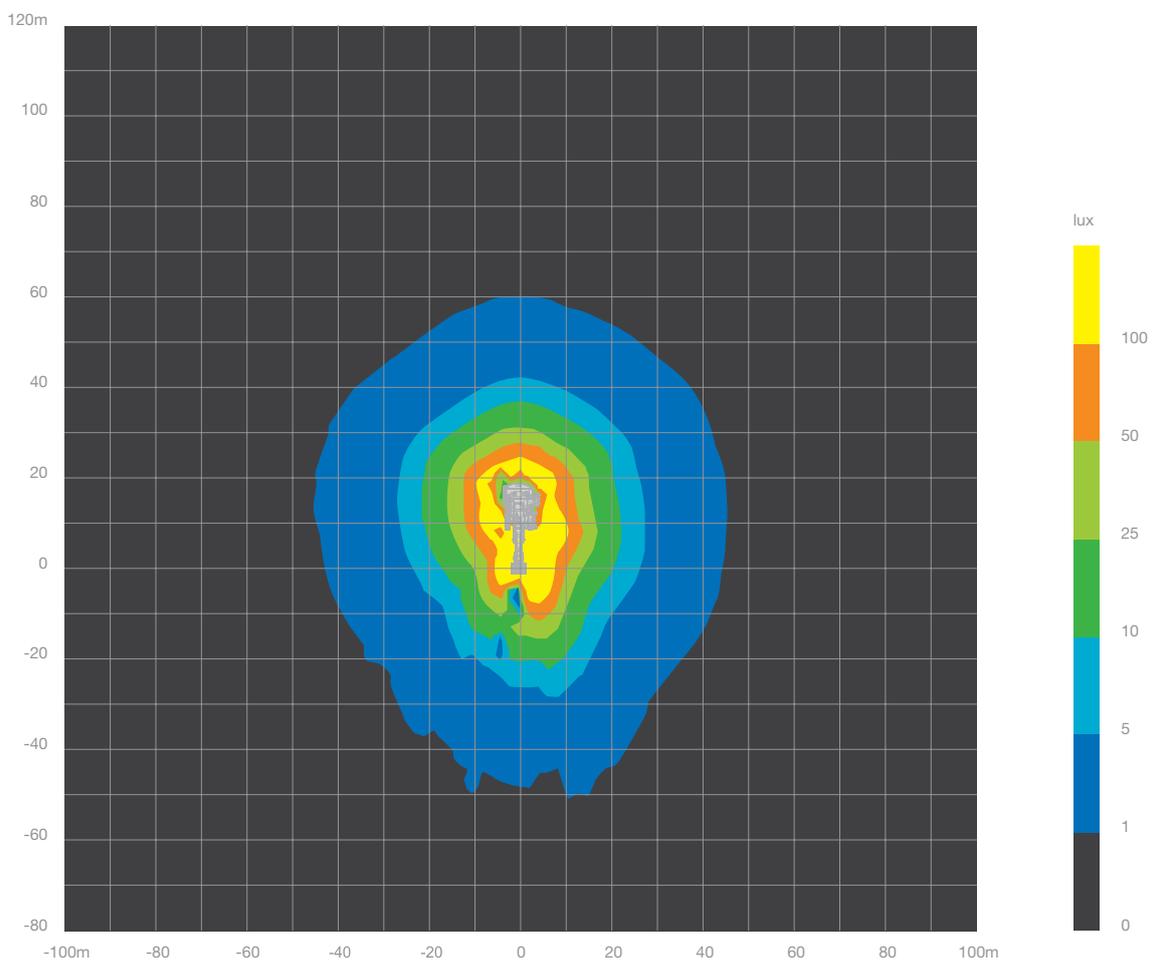

Light loss/maintenance factor: 0.85
Ambient temperature: 35°C

EX2600 Suggested Layout

