

LIEBHERR

R984

Lighting Design Simulation Report





This report is compiled to provide illustrations of product use for a particular application. It is created for evaluation purposes only. Individual machines may vary in configuration, hence affecting results. Please contact us to request a specific design for your application.
Coolon recommends that all system upgrades are carried out by a qualified auto electrician.

LUMINAIRE SCHEDULE


LIEBHERR R984 OPTION A

Model No.	Luminaire	Optic Type	Quantity
CP12-MEDIUM	CP12 Flood Light	MEDIUM Beam Angle	8

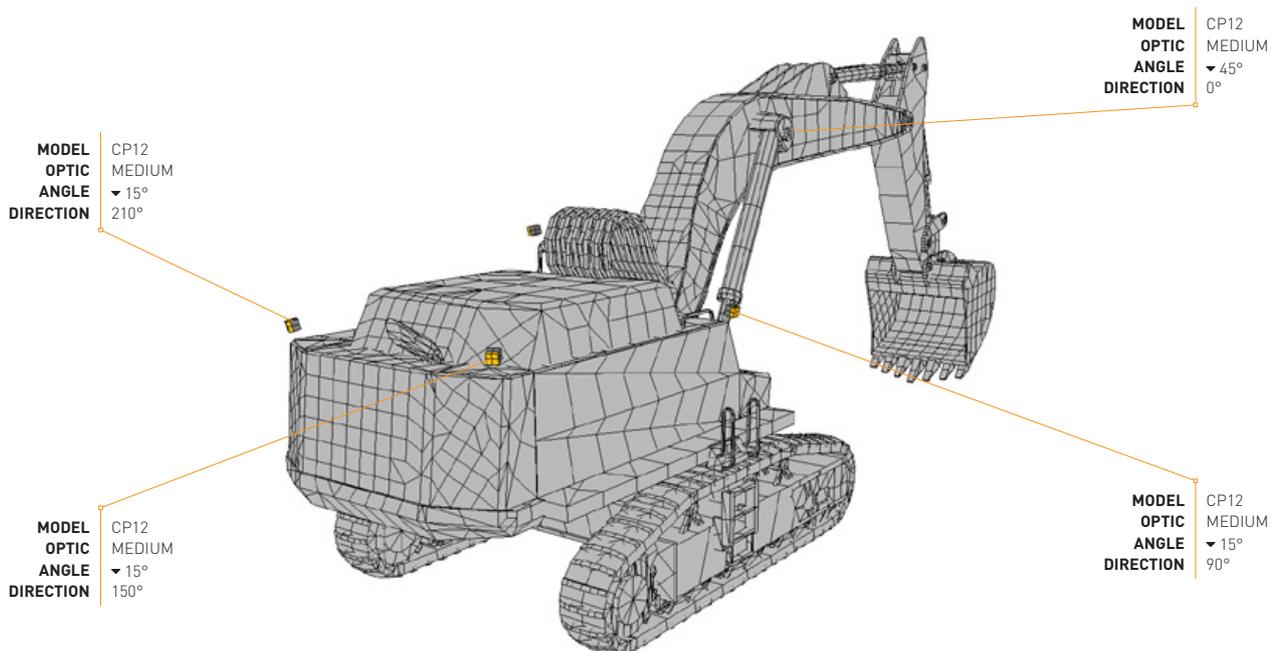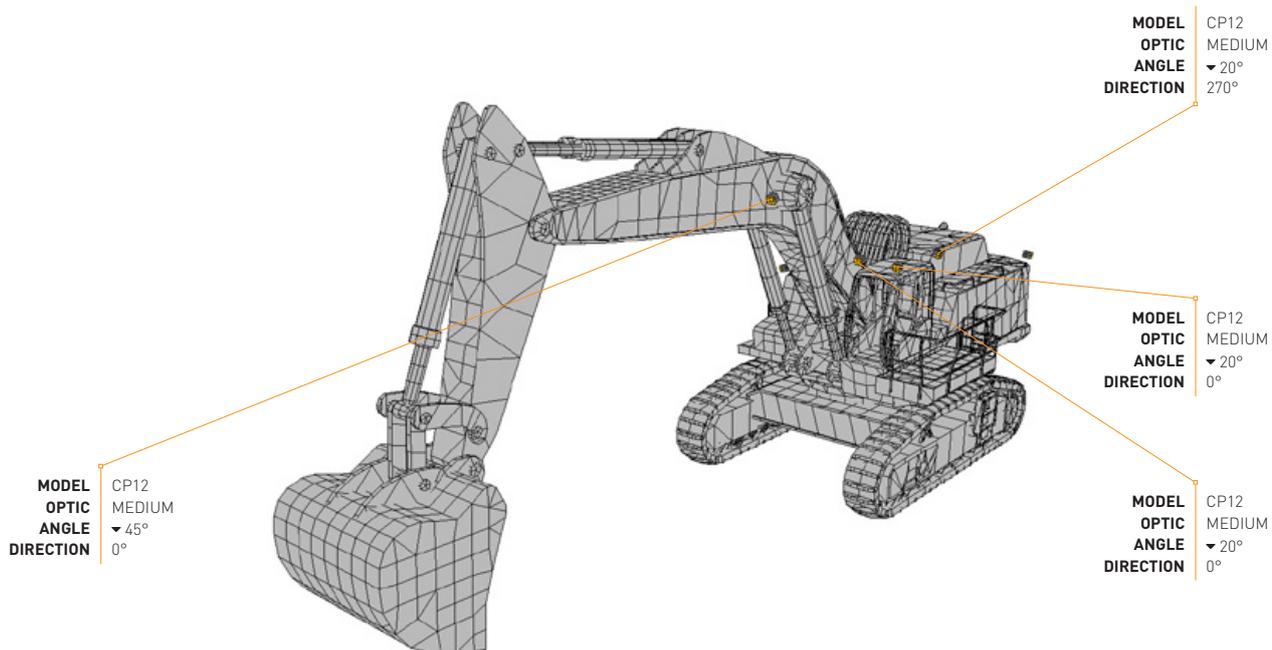

ISOLINE VIEW

LIEBHERR R984
OPTION A

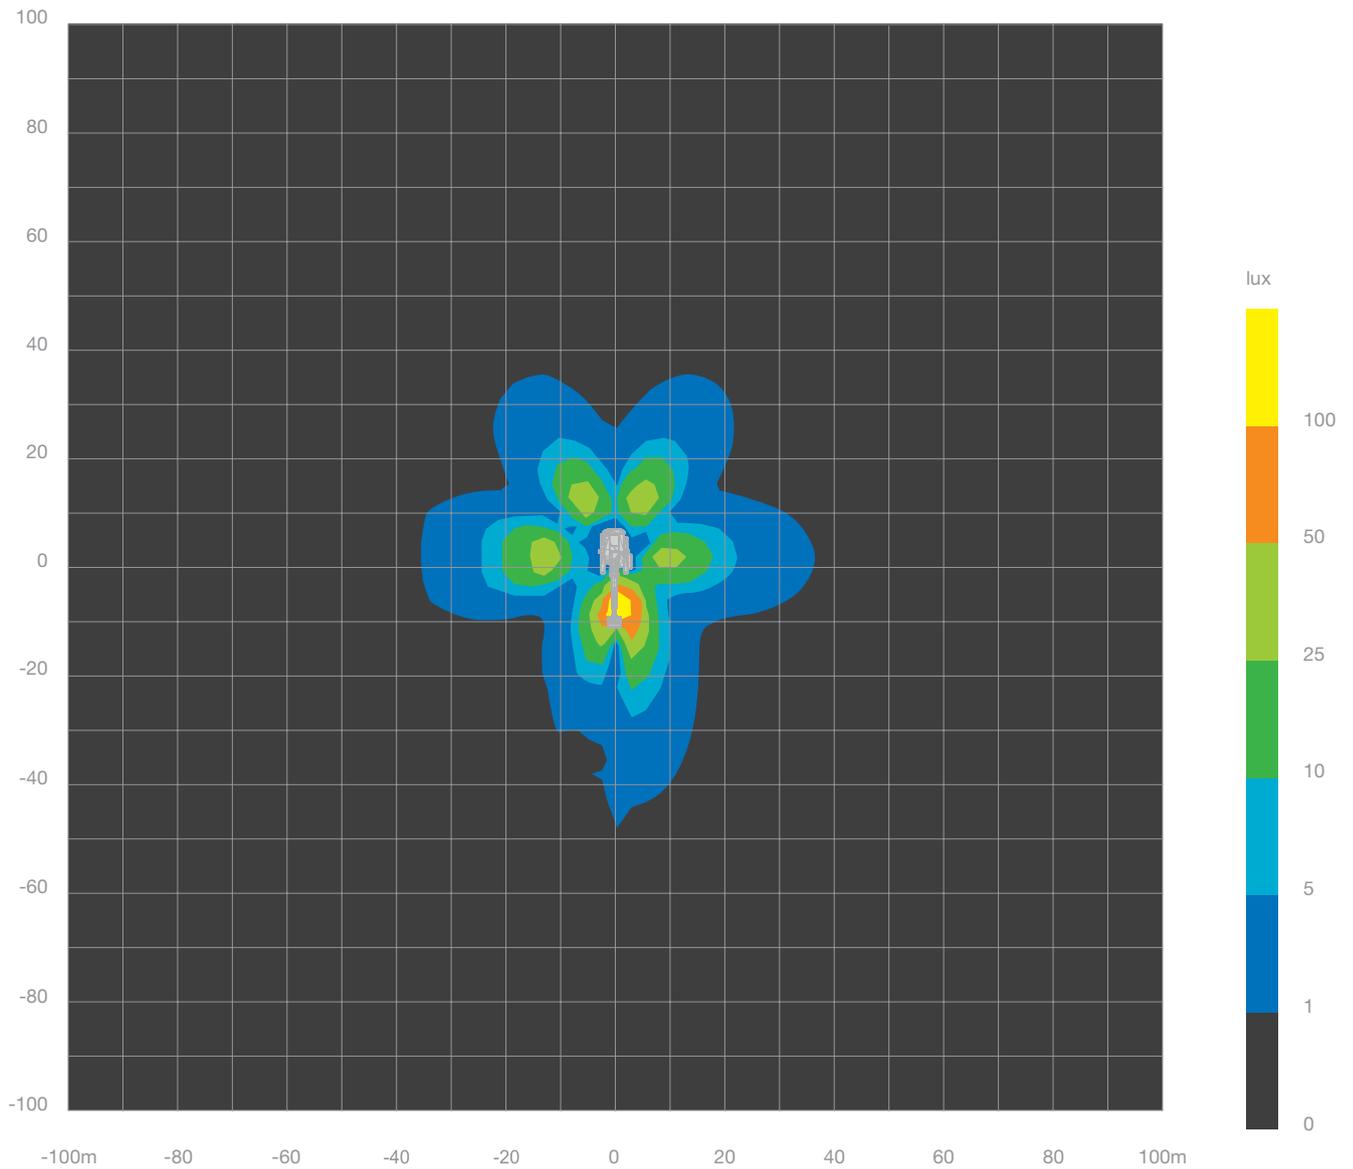

Light loss/maintenance factor: 0.85

Ambient temperature: 35°C


SIMULATION

LIEBHERR R984 OPTION A



OPERATOR'S VIEW


LIEBHERR R984
OPTION A

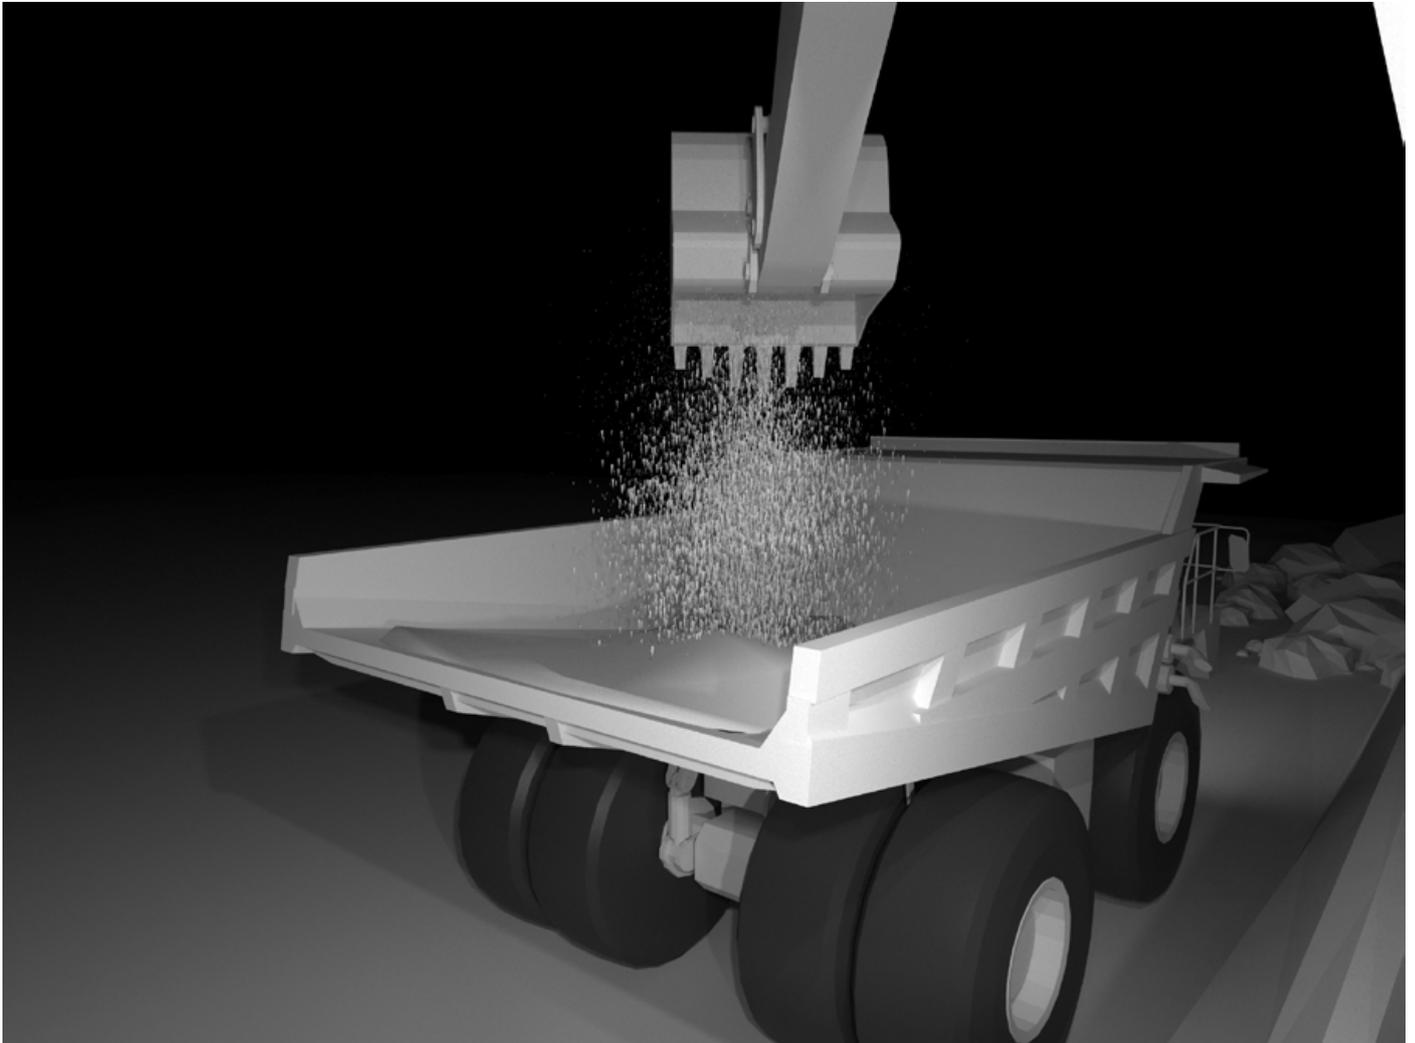

LUMINAIRE SCHEDULE


LIEBHERR R984 OPTION B

Model No.	Luminaire	Optic Type	Quantity
CP24-0209	CP24 Flood Light	0209 - 40° x 18° Beam Angle	1
CP24-MEDIUM	CP24 Flood Light	MEDIUM - 50° Beam Angle	8

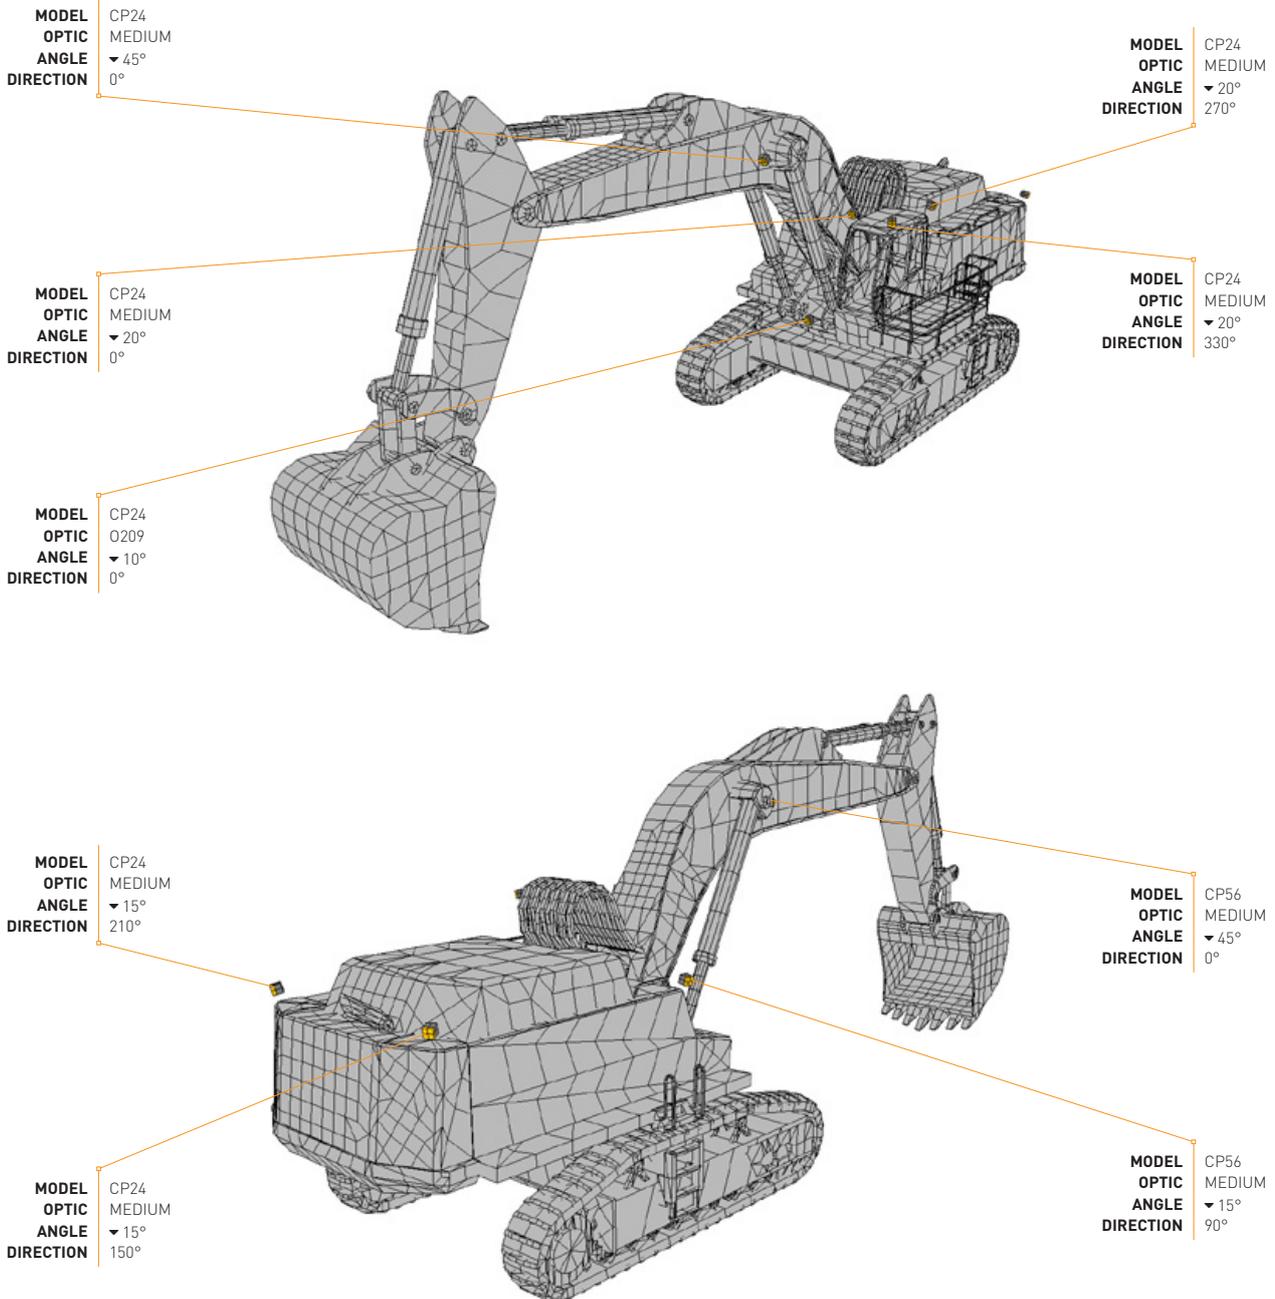

ISOLINE VIEW

LIEBHERR R984
OPTION B

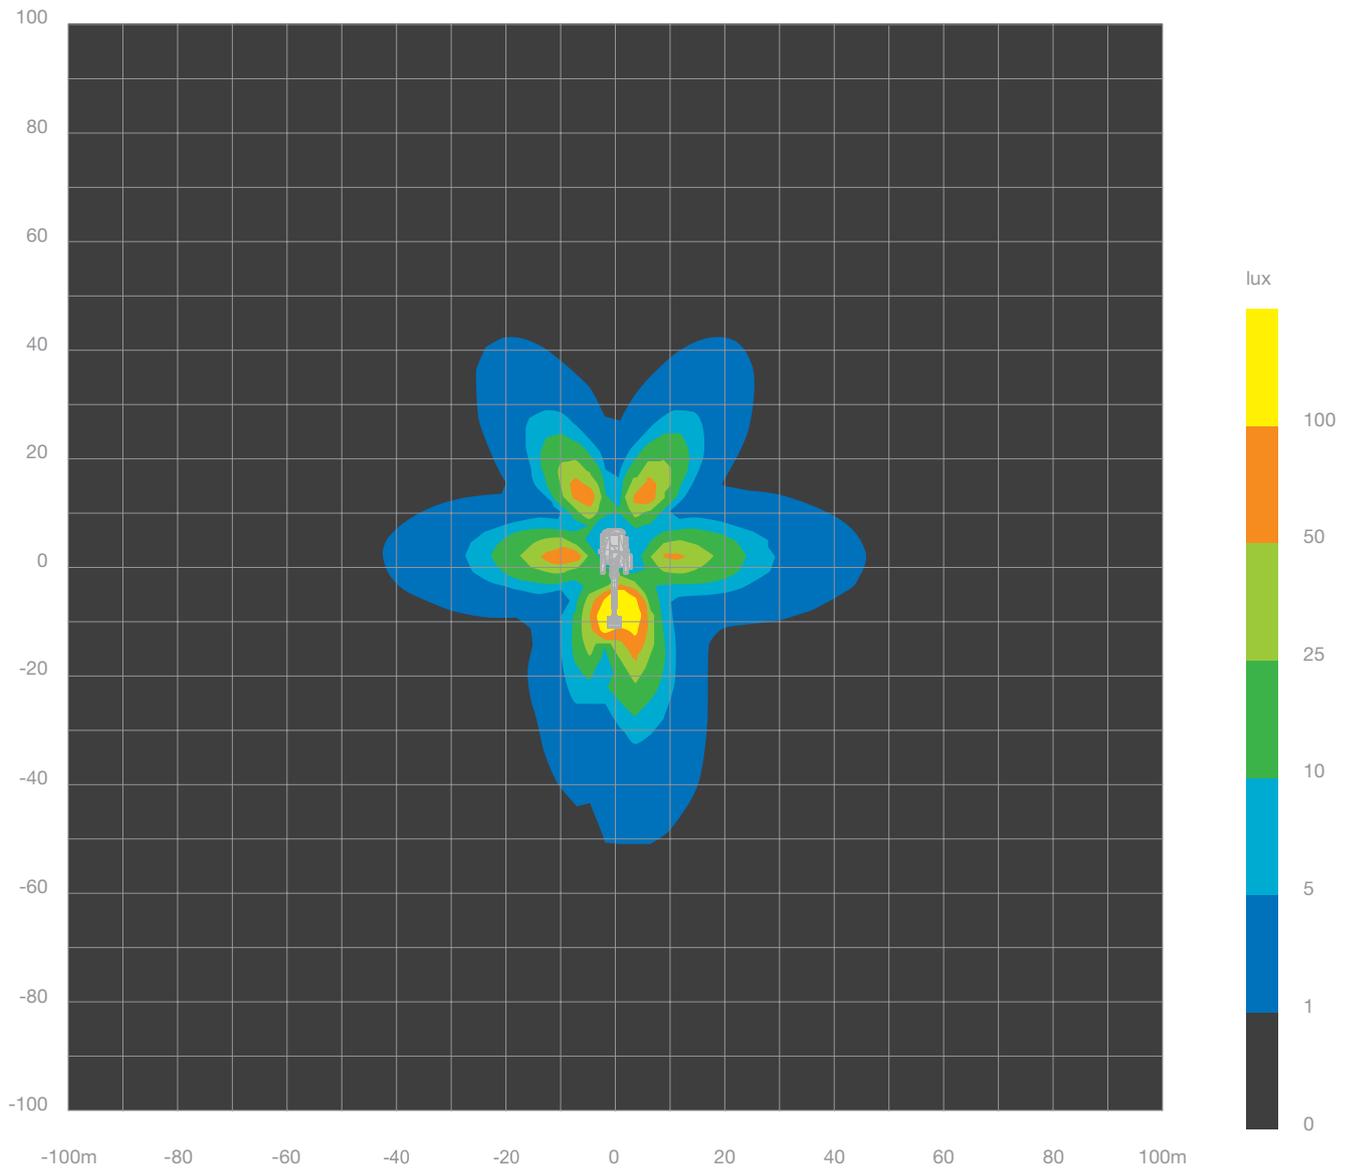


Light loss/maintenance factor: 0.85

Ambient temperature: 35°C

SIMULATION

LIEBHERR R984 OPTION B

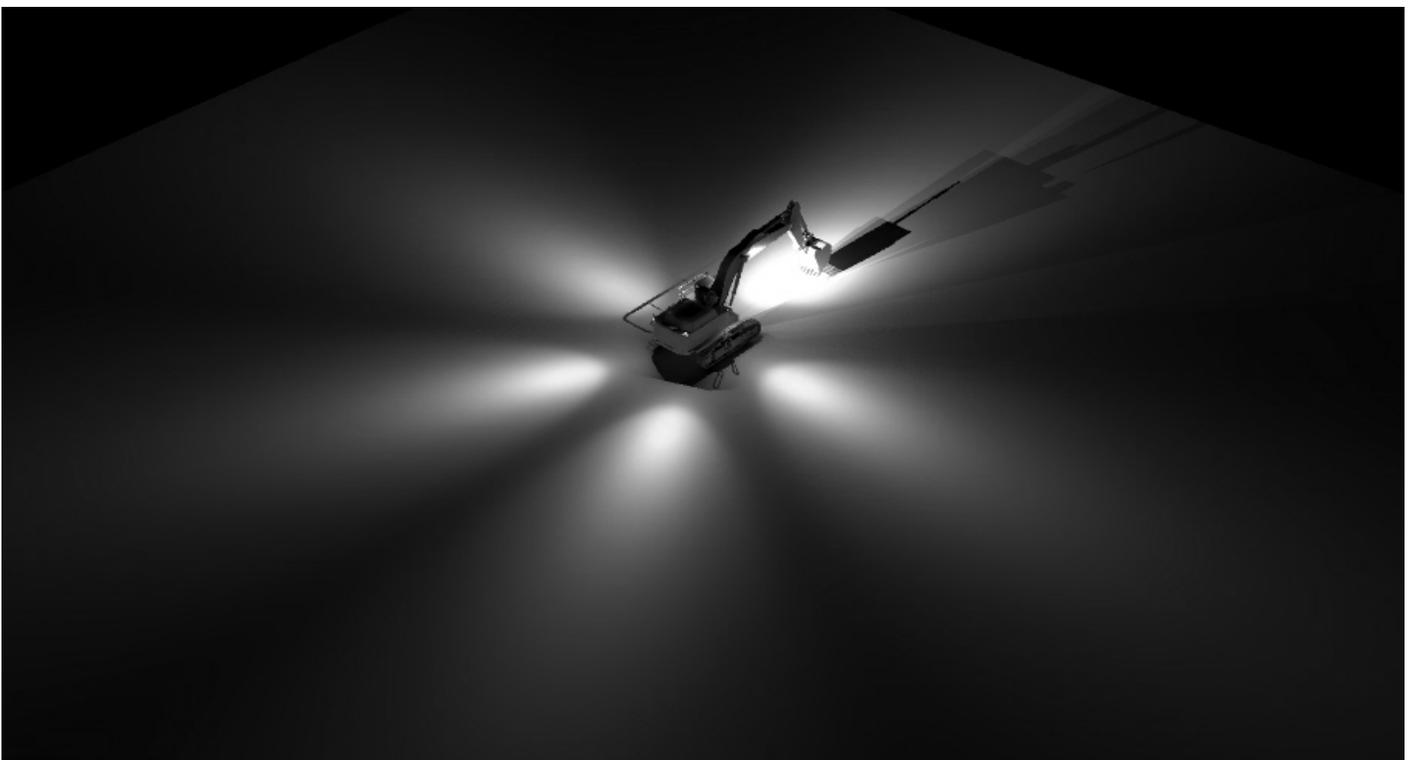

OPERATOR'S VIEW

LIEBHERR R984
OPTION B

