

KOMATSU

PC4000


Lighting Design Simulation Report



LUMINAIRE SCHEDULE


KOMATSU PC4000 OPTION A

Model No.	Luminaire	Optic Type	Quantity
CP24-OVAL	CP24 Flood Light	OVAL Beam Angle	5
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	6

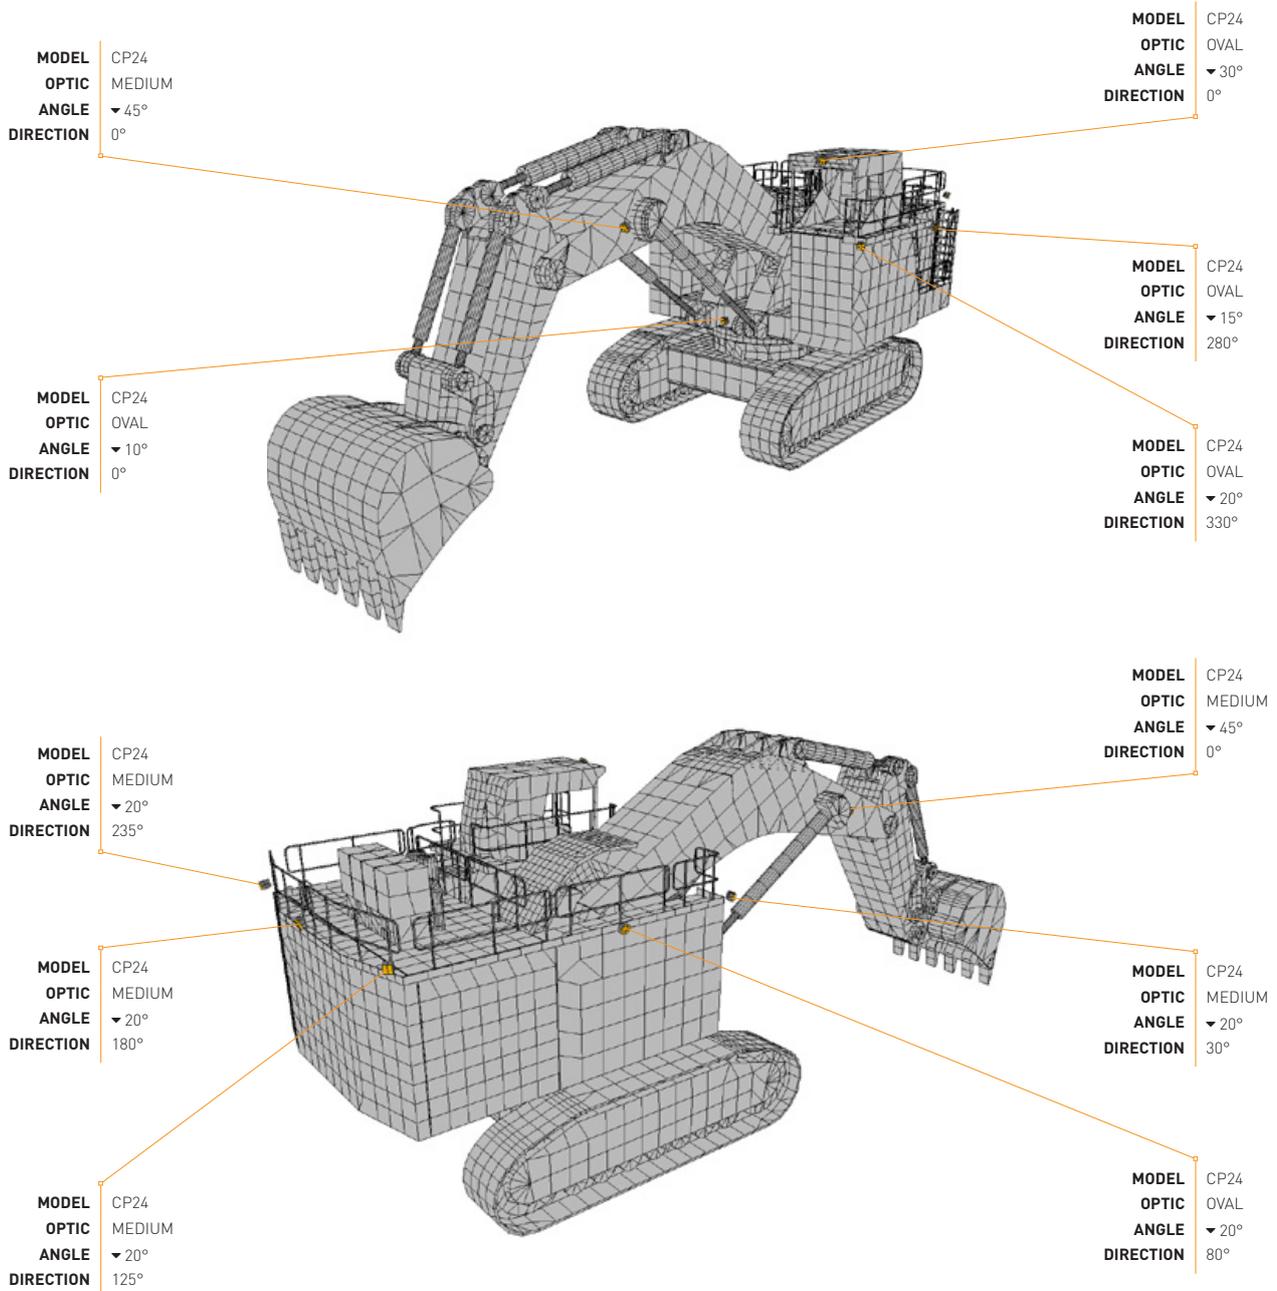

ISOLINE VIEW

KOMATSU PC4000
OPTION A

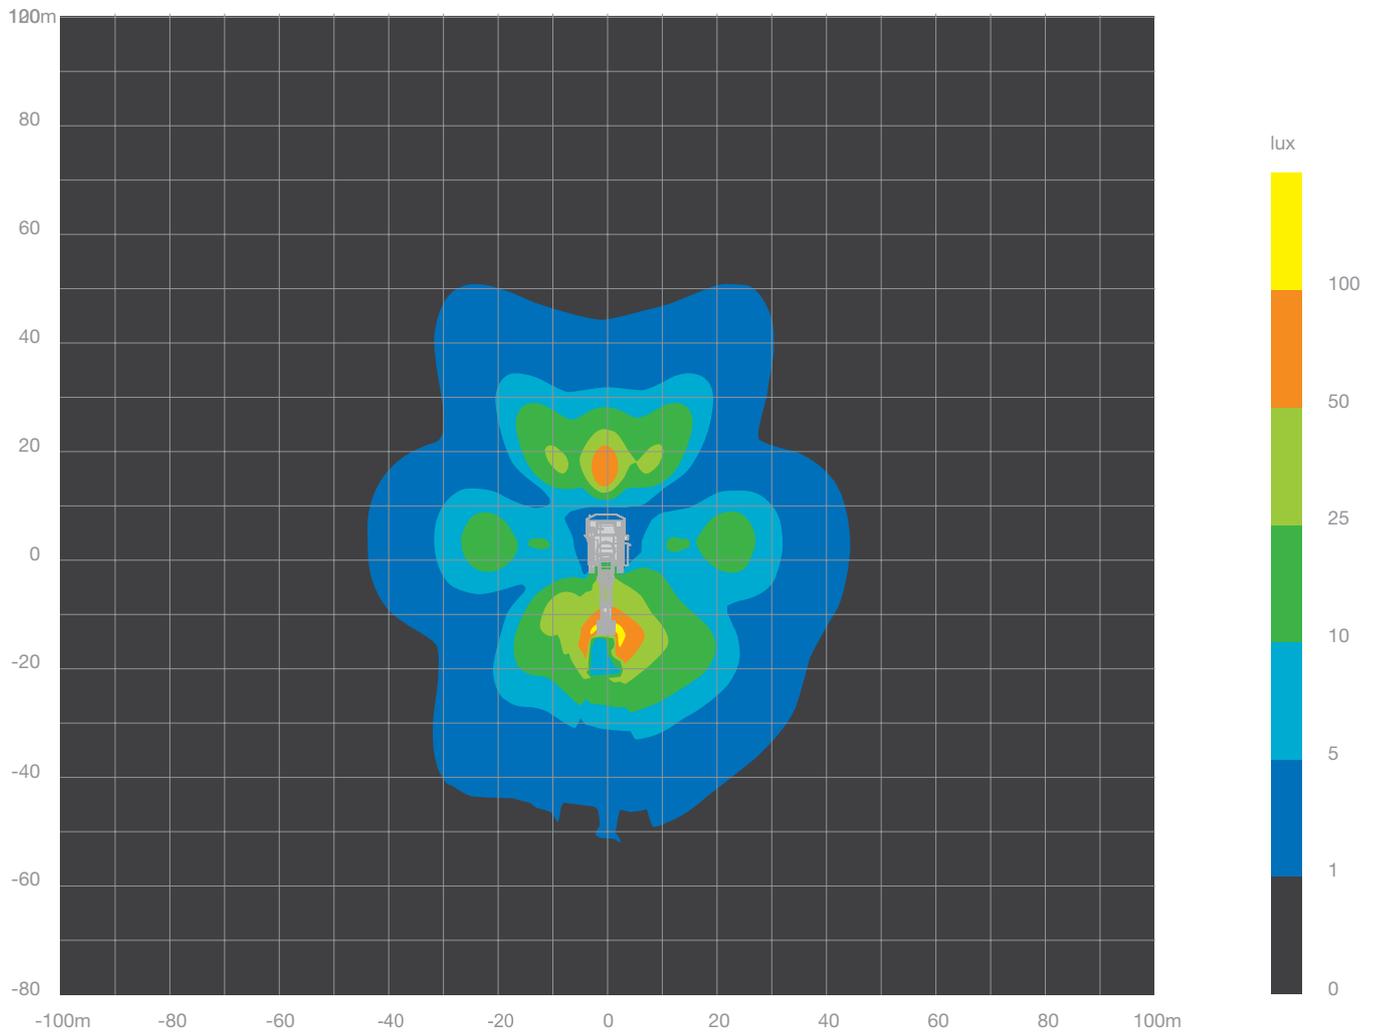


Light loss/maintenance factor: 0.85

Ambient temperature: 35°C


SIMULATION

KOMATSU PC4000 OPTION A

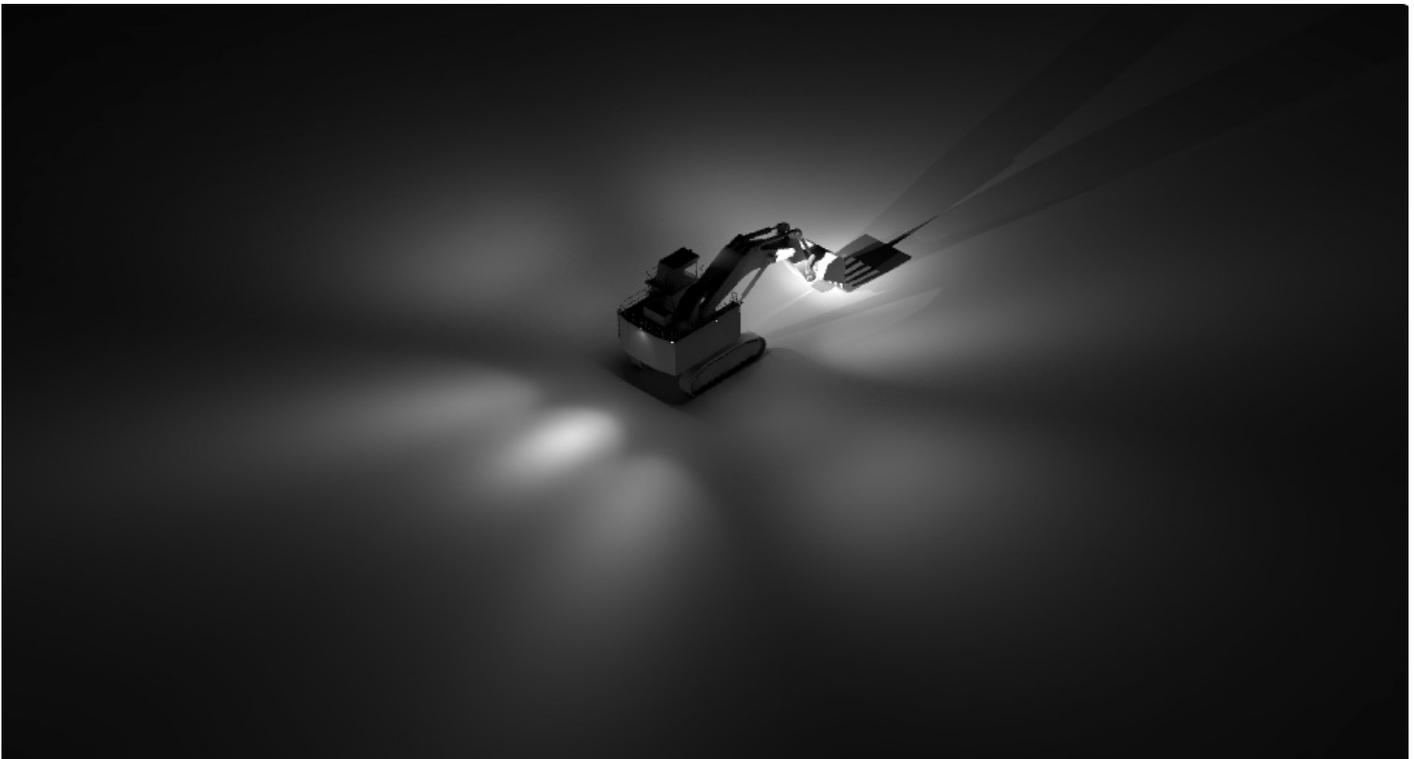

OPERATOR'S VIEW


KOMATSU PC4000
OPTION A

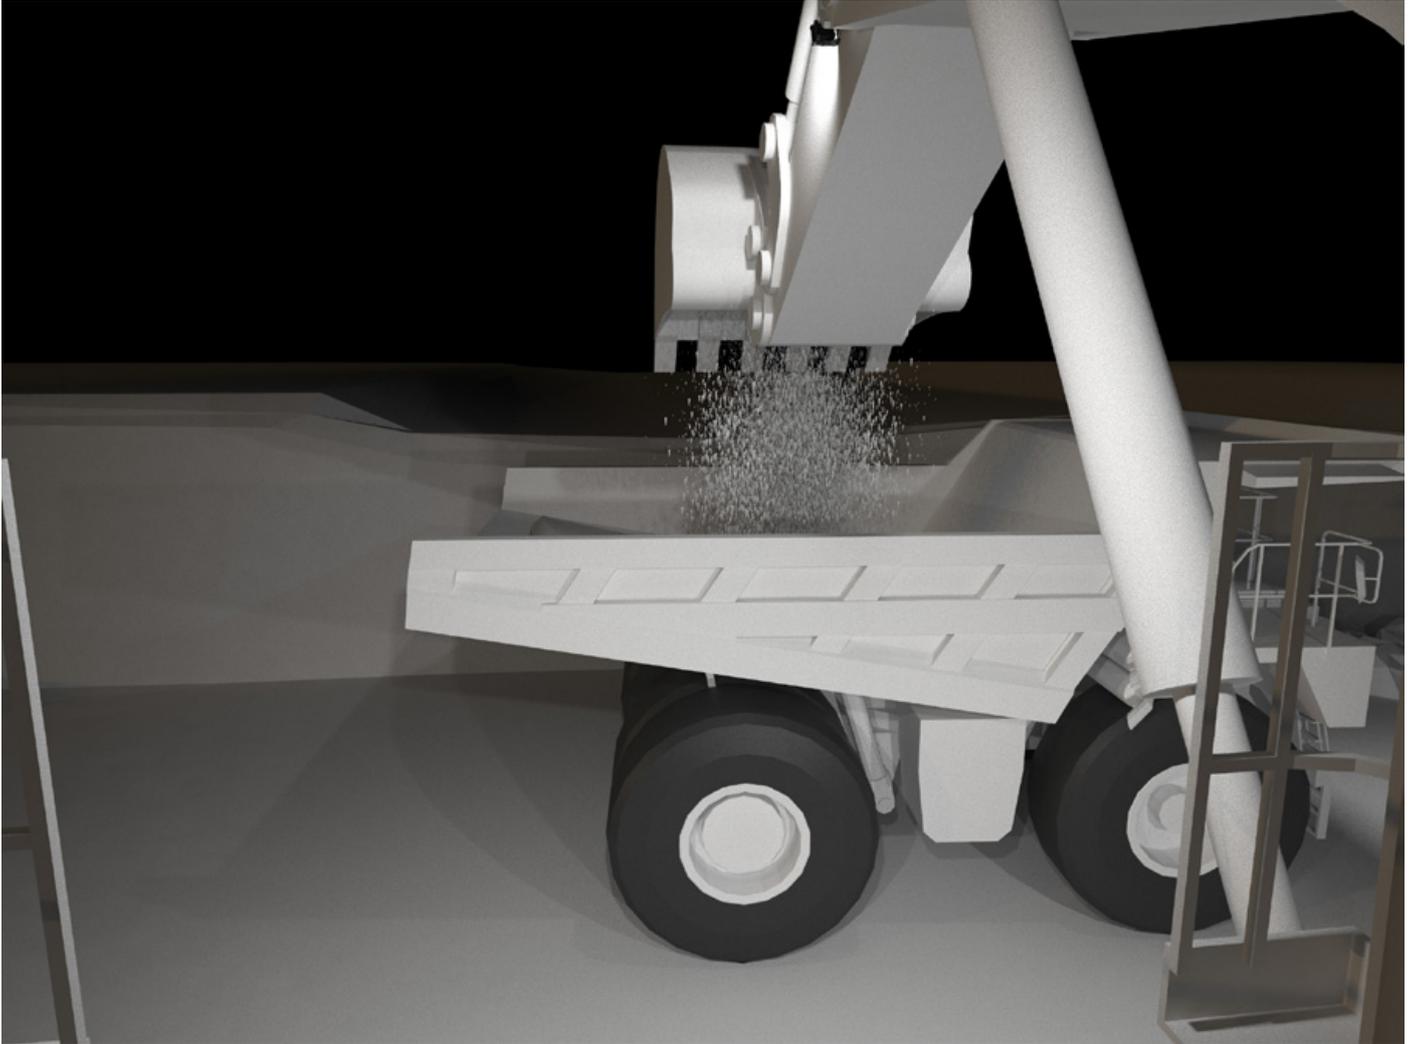

LUMINAIRE SCHEDULE


KOMATSU PC4000 OPTION B

Model No.	Luminaire	Optic Type	Quantity
CP56-OVAL	CP56 Flood Light	OVAL Beam Angle	7
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	1
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

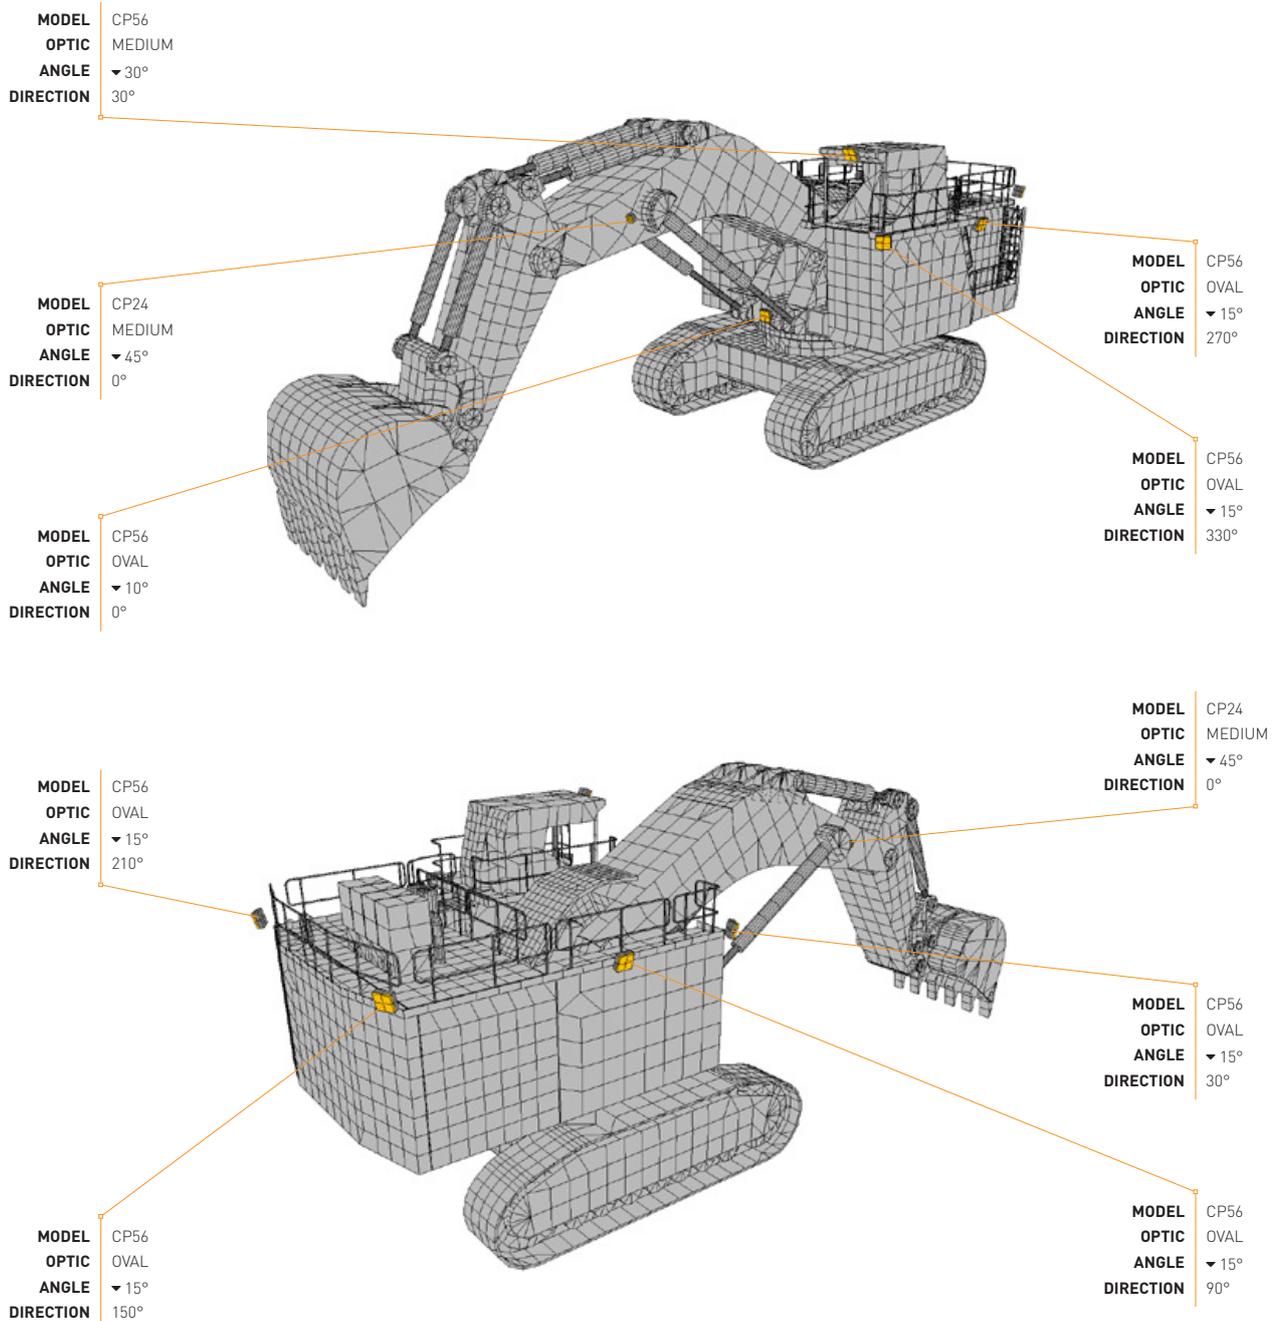

ISOLINE VIEW

KOMATSU PC4000
OPTION B


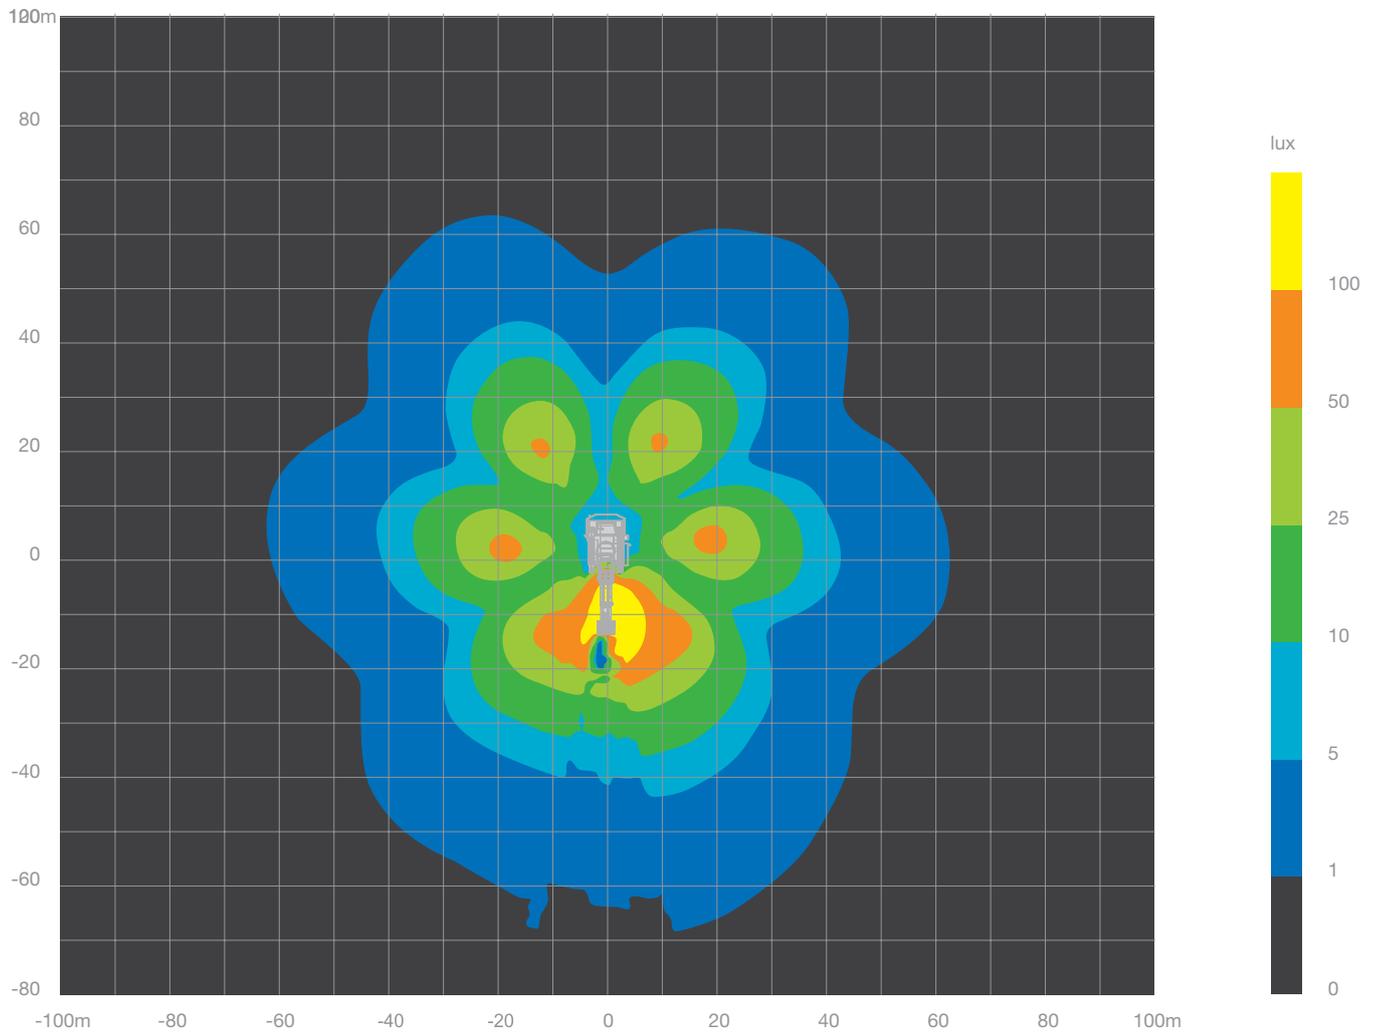


Light loss/maintenance factor: 0.85

Ambient temperature: 35°C

SIMULATION

KOMATSU PC4000 OPTION B

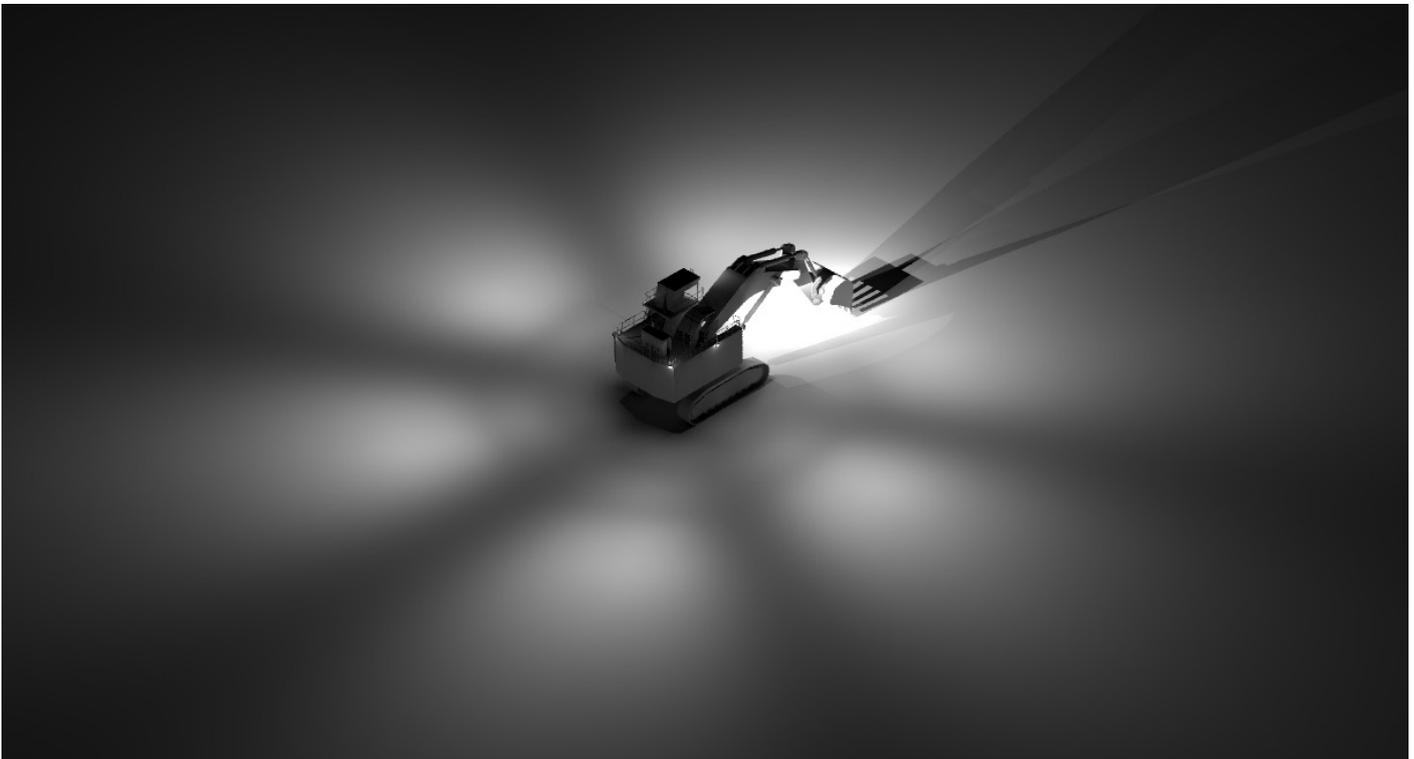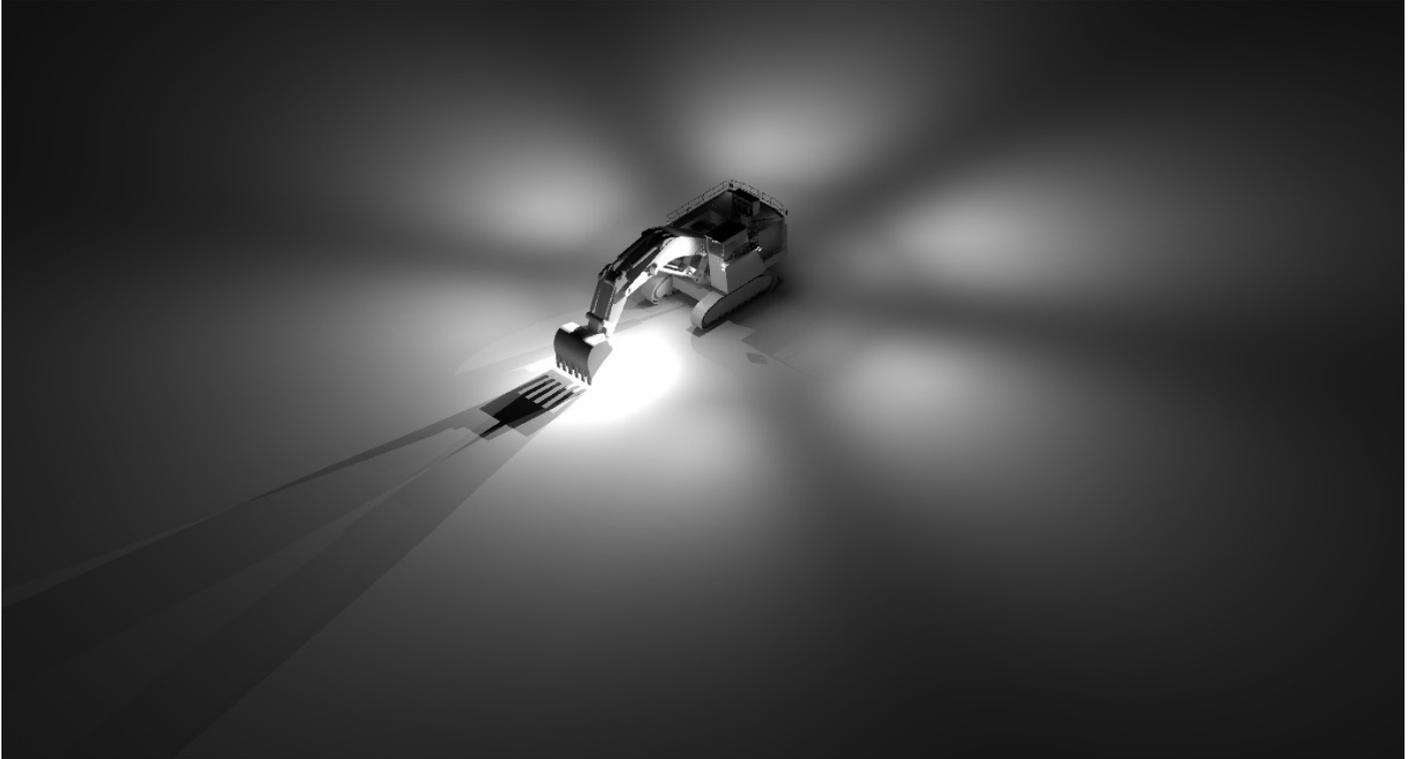

OPERATOR'S VIEW

KOMATSU PC4000
OPTION B

